

NEW! | CINEMA SERIES

JAB Daylight Cinema

92+
CRI

The JAB Daylight Cinema LED fixture in AAdynTech's JAB Series lineup is one of the most sought after lighting fixtures on the market for good reason. Now the JAB is coupled with high CRI (92+) performance to create the JAB Daylight Cinema fixture. Whether for Broadcast ENG remote field production, fixed studio installation, live sports coverage, video shoots or film, the JAB Daylight Cinema provides a wealth of practical benefits and features ideally suited to a wide range of lighting applications. Weighing in at only 19 lbs., its small compact footprint allows for an ease of transport for on-the-go lighting assignments. An unmatched output of better than 1,509 foot-candles at 10 ft. combined with a maximum current draw of a mere 1.77 amps at full brightness means savings up to 90% A/C energy usage. If that weren't enough; the fixture can be operated on 48v DC battery power for situations where conventional A/C supply is problematic or non-existent.

Unlike HMI fixtures, the JAB Daylight Cinema generates minimal heat and no harmful UV or IR emissions - an important safety consideration for both talent and crew. The fixture is self-contained with an auto-ranging universal power supply requiring no heavy, expensive ballast, head cables or replacement lamps. The Daylight boasts fan-less convection cooling and flicker-free operation up to 12,000 frames per second. As with all AAdynTech fixtures; instant 'ON' ensures no warm-up wait time on set - ever. The Daylight comes equipped with specially designed holographic lenses that provide optical efficiency by creating a single light source, effectively eliminating multiple shadows. These four quick change lenses vary the beam angle for very narrow, narrow, medium or flood while maintaining a flat, even field.

There are several control possibilities; built-in UIM, DMX with DMX loop-thru, or the optional illuminated UIM Digital Remote. A heavy-duty yoke is standard. Accessory options include; barn doors, road cases, speed rings, light banks and more. The JAB Daylight is available standalone, or as several full Kit versions coupled with varying accessories and housed in a molded ATA Mil-spec rolling case. The remarkable versatility of the AAdynTech JAB Daylight Cinema truly puts it into a class of its own.



FEATURES AT A GLANCE:

- 92+ CRI across entire brightness range
- 1,509 foot candle output @ 10 feet
- 5600K CCT
- Draws only 1.77 amp at full output 48v DC
- Auto range voltage - 100/277 VAC – 50/60Hz
- Same size and uses the same accessories as JAB Daylight
- Up to 90% energy savings
- Precise brightness control with no color shift
- Single light source eliminates multiple shadows
- No heat generation - operates cool to the touch
- Douse button (momentary off)
- Included 5°, 15°, 30°, 55° lenses to vary beam angle
- No head cables, ballast or spare lamps
- Built-in User Interface Module (UIM) with optional corded UIM controller port
- Recalibration countdown hour 'smart' meter
- UIM, DMX or digital remote control
- Programmable multiple lightning and strobe effects
- Multiple user memory storage with recall
- 2 year warranty on fixture
- Operating temperature at -20c to +50c
- Certified UL, ETL, CSA, CE & RoHS compliant

JAB Daylight Cinema

NO DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	16,224	7,737	4,082
Foot Candles	1,509	719	379

5° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	11,318	5,547	2,753
Foot Candles	1,050	515	256

15° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	8,190	3,984	2,125
Foot Candles	753	362	197

30° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	5,240	2,350	1,345
Foot Candles	487	218	125

55° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	2,215	1,020	585
Foot Candles	206	95	54

DIFFUSER

DIFFUSER	BEAM ANGLE	FIELD ANGLE
0°	14.1°	17.1°
5°	17.6°	22.6°
15°	19.2°	30.6°
30°	28.4°	48.5°
55°	50.1°	73.8°

At 90° angle to incident surface

SPECIFICATIONS

Control	Local, UIM, DMX
Source	LED, 5600K CCT, 92+ CRI
Cooling	Passive
Mounting	Baby Pin or Junior
Certifications	ETL, UL, CSA, CE and RoHS Compliant

DIMENSIONS





Length	339.0 mm	13.3 in
Width	326.5 mm	12.9 in
Height	554.9 mm	21.8 in
Weight	8.9 kg	19.5 lbs

POWER

Input Voltage	100-277v AC	Battery (48v DC)
Input Freq	50/60 Hz	
Input Current	1.77 Amp @ 120V	212 Watts @ full
Connection	US NEMA 5-15	

HIGHLIGHTS

- RoHS Compliant
- 1,509 foot candles @ 10 feet
- Daylight-Balanced at 5600K CCT
- Dimmable with no color shift
- Draws 1.7 amps at max output
- No harmful UV or IR radiation

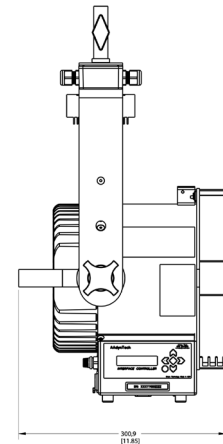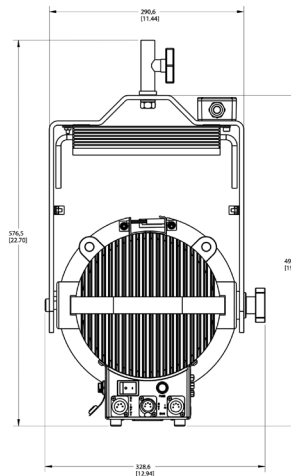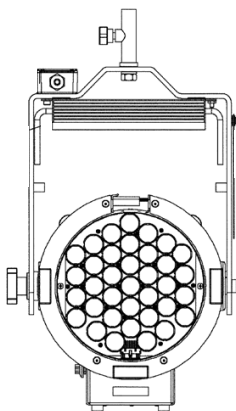

©2023 Sturdy Corporation. All rights reserved. As technical advancements continue, all specifications are subject to change without notice.